




Thank you for purchasing a loading ramp from the #1 Ramp Super Store in America. We are confident that your ramp will serve you many years of safe and effective loading. Use these instructions to best experience your ramp.

**! ATTENTION !**

READ AND FOLLOW THESE INSTRUCTIONS BEFORE USING THIS PRODUCT. IMPROPER USE COULD RESULT IN INJURY, AND PRODUCT OR PROPERTY DAMAGE.

**Assembly**

Before assembling, check the included hardware for correct parts and quantities. If you are missing any parts contact Discount Ramps at 1-888-651-3431.

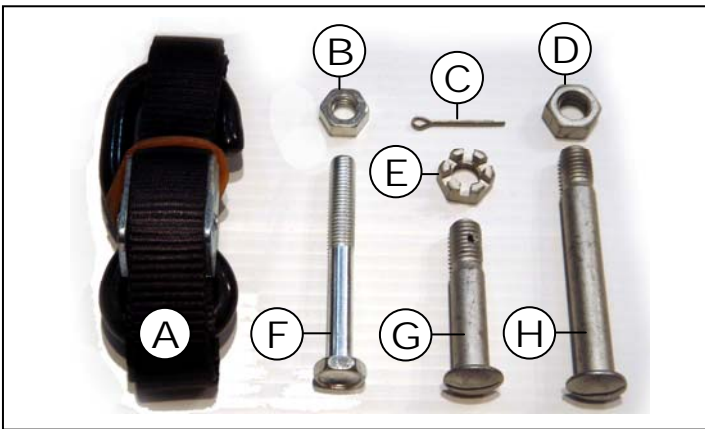

- |                                       |                                     |
|---------------------------------------|-------------------------------------|
| <b>A – Safety Straps (3)</b>          | <b>B – Ramp Connector Nuts (8)</b>  |
| <b>C – Cotter Pins (2)</b>            | <b>D – ½ " Nuts (2)</b>             |
| <b>E – ½ " Slotted Hinge Nuts (2)</b> | <b>F – Ramp Connector Bolts (8)</b> |
| <b>G – 2 " Hinge Bolts (2)</b>        | <b>H – 4 " Hinge Bolts (2)</b>      |

1. Start by assembling the outside (narrow) ramps.
2. Stand one flat ramp and one curved ramp on end with tread surface facing out.
3. Insert one 2" Hinge Bolt into the hinge bracket, connecting the two ramps and thread one ½ " Slotted Hinge Nut onto the Hinge Bolt (Figure 1).
4. Insert a Cotter Pin through the bolt. You may have to back out the Hinge Nut to give room for the Cotter pin.
5. Use pliers to bend Cotter pin ends (Figure 2)
6. Repeat steps 2-6 on the second set of narrow ramps. Install the bolt on the opposite hinge.
7. When both narrow ramps are assembled, begin on the center ramp.
8. Stand the center flat ramp and curved ramp on end with tread surface facing out.
9. With the narrow ramps on each side of the center ramp, and the bolted hinges facing out, slide the ramps together with the connector brackets overlapping the narrow ramps (Figure 3).
10. Insert 4" Hinge Bolts into the hinges, connecting the two ramps.
11. Thread one ½ " Hinge Nut onto each Hinge Bolt (Figure 4).
12. Install and tighten the (8) Ramp Connector bolts and nuts as shown in Figure (5)



Figure 1



Figure 2

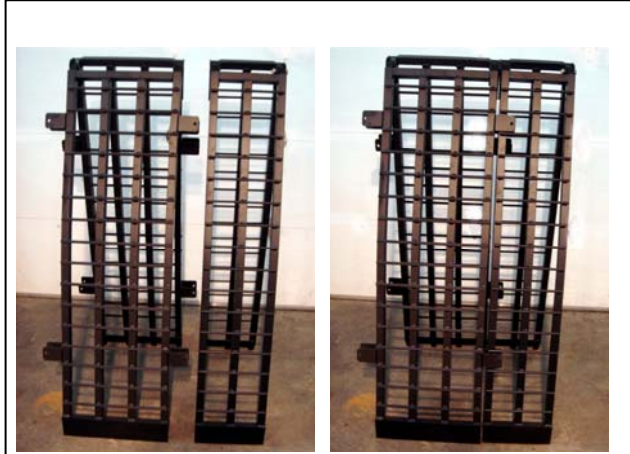


Figure 3



Figure 4



Figure 5

## Instructions for Proper Use

### **! WARNING !**

NEVER EXCEED MAXIMUM RATED WEIGHT CAPACITIES OF RAMPS. USE AT YOUR OWN RISK.

### Preparation for Loading

1. Park truck or trailer on firm, flat ground.
2. Remove any obstructions from truck/trailer bed.
3. Check tailgate cables/brackets for damage or wear. If tailgate is not sturdy or cables are damaged, do not continue.
4. Unfold ramps and place the ramp snugly on the tailgate with the end plate lip overlapping the tailgate (Figure 6).

### Securing Ramps

1. Before each use, check straps for fraying and wear, do not use damaged straps.
2. Loop the strap around the center section of the ramp just below the second rung (Figure 7).
3. Find a secure place to hook the safety strap. Tow hitch points or bumper supports are recommended. Hook both ends of the strap to the vehicle/trailer (Figure 8).
4. Tighten the Strap until tight and ramp is secure against tailgate/trailer.
5. Repeat steps 1-4 with the second strap.

### Loading

1. If possible, have a second person help loading.
2. Start motorcycle; allow it to run to ensure it doesn't stall on the ramp.
3. Position motorcycle to ride up the center of the ramp.
4. Slowly ride up the ramp, keep hand near the brake be ready to put feet down in case of stall. Acceleration must be slow, smooth and constant.

### **! WARNING !**

NEVER OVER ACCELERATE! OPERATOR MUST BE IN CONTROL OF VEHICLE AT ALL TIMES. LOSS OF CONTROL COULD RESULT IN INJURY.

5. Stop when motorcycle is in truck bed/trailer.
6. Secure motorcycle to truck/trailer. Remove ramp and straps.

### Unloading

1. If possible, have a second person help unloading.
2. Follow steps from Preparation for Loading and Securing Ramps.
3. Clear the unloading area behind the ramp.
4. Sit on the motorcycle with hand on brake, put up kickstand.
5. With motorcycle OFF and in NEUTRAL, slowly back down the ramp in a walking motion, letting the brake slip.
6. Park the bike. Remove ramp and straps.

## Care

### Straps - Before each use:

- Check straps for fraying and wear, do not use damaged straps.
- Keep out of direct sunlight.
- If wet, dry thoroughly before storing.

### Ramps - Before each use:

- Check all ramp bolts and nuts for tightness before each use.
- Inspect ramps for damage; do not use damaged or bent ramps.



Figure 6

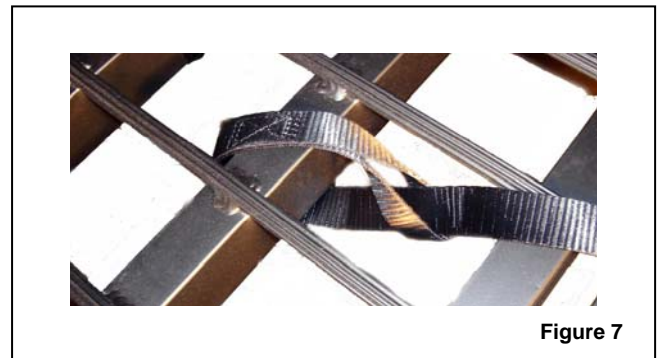


Figure 7

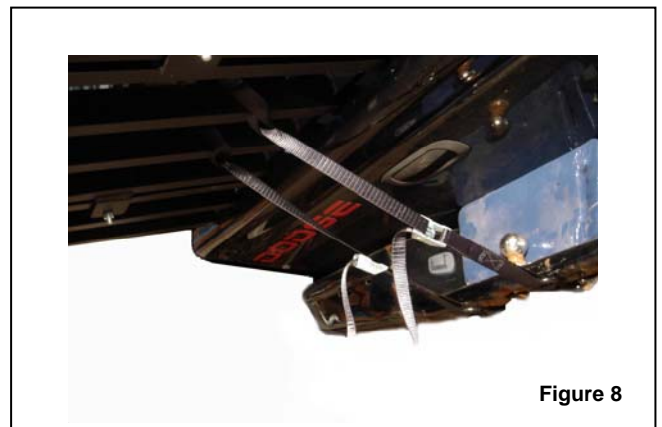


Figure 8